PAOLO

3 Light Flush Polished Chrome With Bespoke Shade 50cm



The small Paolo Ceiling fitting combines a shallow bespoke drum shade with a white cotton diffuser which provides a soft and even distribution of light. The shade sits neatly to the ceiling and the minimal height of the shade makes it a popular choice for areas with low ceilings. The Paolo fitting can also be supplied with dedicated LED control gear upon request.


The Paolo comes complete with a Bespoke Fabric Drum shade.
Height is adjustable at the point of installation (15-15cm).
Bulb not included; takes 3 x 20W max ES GLS. We recommend our BUL-E27-LED-17 bulb. Click here to shop.
Dimmable when paired with suitable bulbs.

Bespoke Shades
Our high quality fabric shades, hand crafted in our Oxfordshire workshop by our sister brand The Light Shade Studio, with a choice of luxurious fabrics in 100% Dupion Silk, Satin or Linen in an array of shapes, sizes, and colours. If you would like to supply your own fabric, then please contact us to discuss your personalised requirements. Customise your shade by using our product configurator to see your design before placing an order.

Returns
As our bespoke or customised fittings are made to your specific specification, these are not covered by our standard returns policy. We are unable to offer refunds after the initial 24 hour cooling off period. Please see our Terms and Conditionsfor more details. None of the above affects your statutory rights where goods are faulty or not as described.

SPECIFICATIONS:

Product code:	PAO50
Measurements:	H min15 - max15 x Ø50cm
Lamp Replaceable:	Yes
Finish:	Bespoke & Polished Chrome
Material:	Fabric & Metal
Shade Included:	Shade Inc
Primary Bulb Detail:	3 x 20w max ES GLS
Bulb Included:	Lamps not included
Recommended Lamp:	BUL-E27-LED-17
Suitable:	Indoor
Electrical Class:	Class 1 - Earthed
Nett Weight (kg):	1.4 kg
	EH

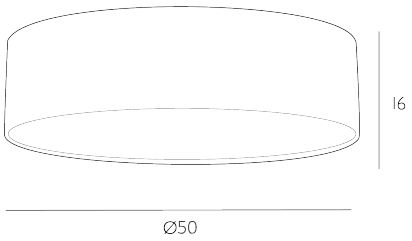

Additional Information:

Lamps not included. We recommend our BUL-E27-LED-17 bulb | Supplied with Bespoke Fabric shade | Height is adjustable at the point of installation (15-15cm)